

Keysight Technologies N4984A Clock Divider

Data Sheet



For microwave, communications, and test applications

Features

- Divide by 1/2/4/8
- Wide operating range
- Fast rise/fall times
- Low jitter
- Excellent signal quality

N4984A-020 Clock Divider

Description

The N4984A-020 clock divider divider is a general purpose test accessory designed for microwave, communications and test applications. The accessory provides divide-by-1, divide-by-2, divide-by-4, or divide-by-8 output. Inputs and outputs are AC coupled. The divider is self contained and plugs into standard AC power sources.

Application

The N4984A-020 clock divider divider can be used to extend the trigger range of high speed sampling oscilloscopes. Precision timebase measurements will benefit from the very low added jitter and fast waveform edges. The N4984A-020 clock divider can be used to generate synchronized, high frequency clocks from existing sinusoidal, synthesized sources. The low 1/f phase noise characteristics of the divider will benefit high frequency phase lock loop designs.



Key specifications

Description	
Input frequency range	0.2 to 20 GHz
Input power range	0 to +10 dBm (~0.6 to 2 Vpp) from 0.2 to 1 GHz -10 to +10 dBm (0.2 to 2 Vpp) from >1 to 20 GHz
Output power range	5 dBm (355 mV pp) typical (see plot)
Single sideband phase noise	153 dBc nominal @ 10 kHz offset

Features

- Wide frequency range: 0.2 to 20 GHz
- High input sensitivity
- Very low phase noise
- Fast rise/fall times
- Divide-by-1/2/4/8 outputs
- AC power supply included

Frequency Divider Application

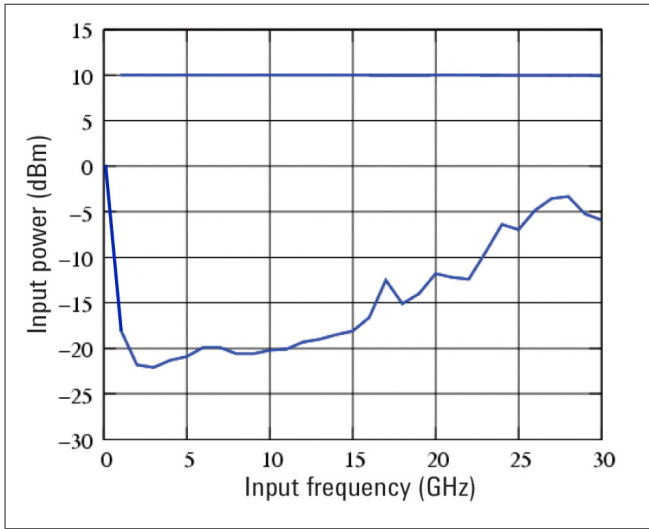


Figure 1. Min/Max single-ended power Input sensitivity window

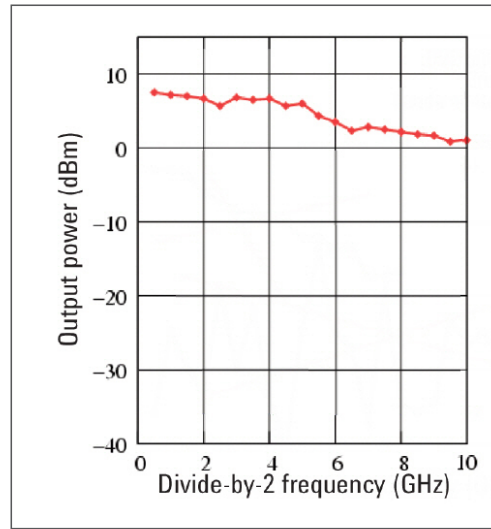


Figure 2. Binary divide-by-2 output power

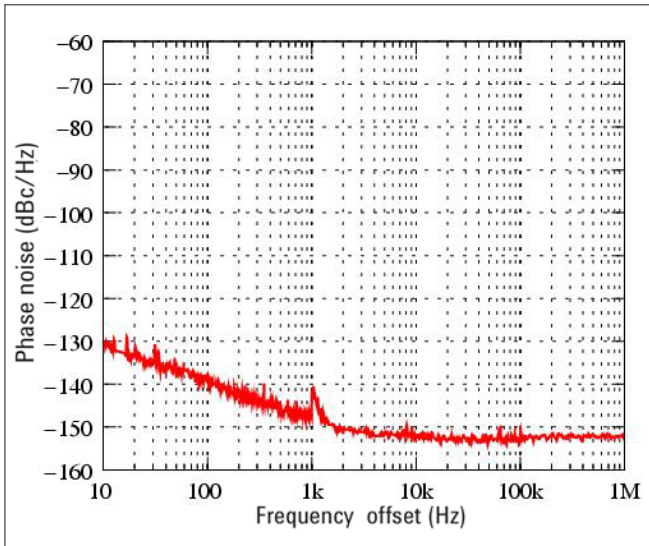


Figure 3. N4984A-020 clock divider: SSB phase noise for binary divide-by-8 configuration
Input freq = 7.8 GHz, gain S21

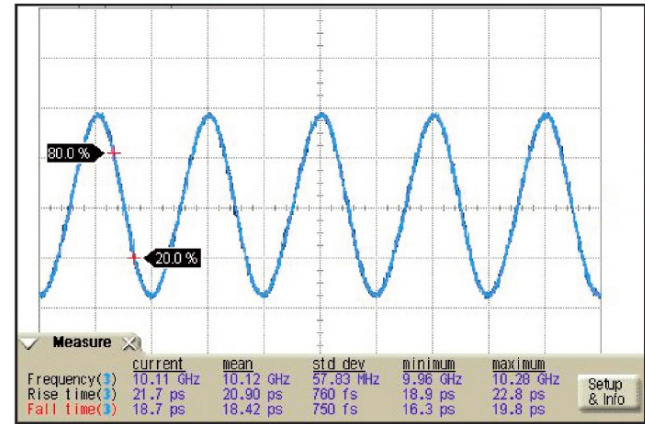


Figure 4. Binary divide-by-2 configuration
Input freq = 20 GHz, 150 mV/div

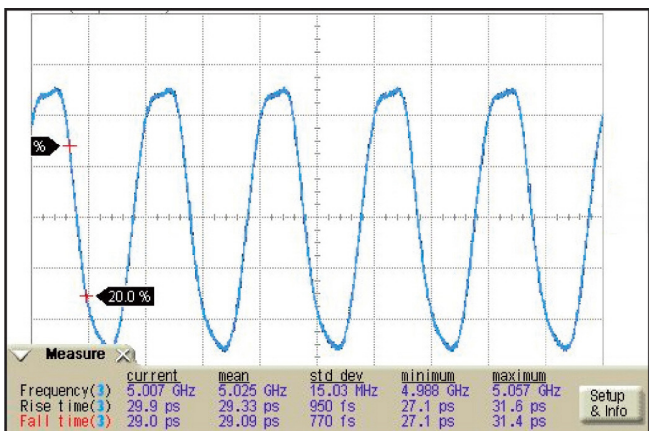


Figure 5. Binary divide-by-4 configuration
Input freq = 20 GHz, 150 mV/div

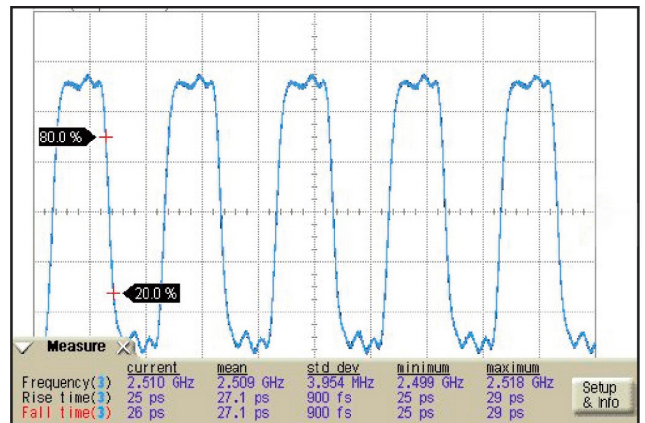


Figure 6. Binary divide-by-8 configuration
Input freq = 20 GHz, 150 mV/div

N4984A-040 Clock Divider

Description

The N4984A-040 clock divider divider is a general purpose test accessory designed for microwave, communications and test applications. The accessory simultaneously provides divide-by-2, divide-by-4, and divide-by-8 outputs. The single-ended input is accessed from the rear via a 2.9 mm connector while the outputs are provided at the front panel via SMA connectors. All inputs and outputs are AC coupled. The divider is self contained and plugs into standard AC power sources.

Application

The N4984A-040 clock divider divider can be used to extend the trigger range of high speed sampling oscilloscopes. Precision timebase measurements will benefit from the very low added jitter and fast waveform edges. The N4984A-040 clock divider can be used to generate synchronized, high frequency clocks from existing sinusoidal, synthesized sources. The low 1/f phase noise characteristics of the divider will benefit high frequency phase lock loop designs.



Key specifications

Description	
Input frequency range	0.2 to 40 GHz
Input power range	0 to +6 dBm (~0.6 to 1.2 Vpp) from 0.2 to 35 GHz +2 dBm (800 mV pp) nominal with minimum window of 3 dB from >35 to 40 GHz (see plot)
Output power range	> -6 dBm (315 mV pp) typical
Single sideband phase noise	-153 dBc nominal @ 10 kHz offset

Features

- Wide frequency range:
0.2 to 40 GHz
- High input sensitivity
- Very low jitter
- Fast rise/fall times
- Divide-by-2/4/8 outputs
- AC power supply included

Frequency Divider Application

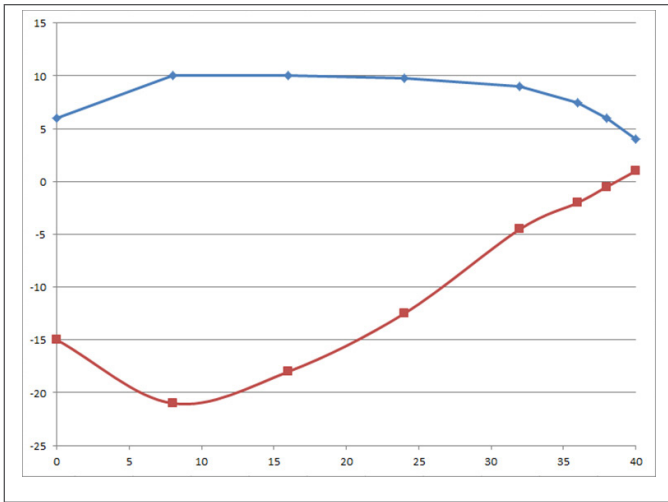


Figure 7. Input sensitivity window min/max single-ended input power

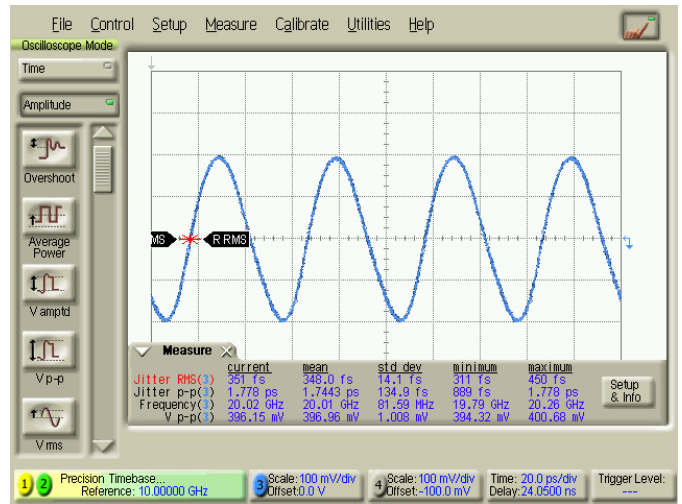


Figure 8. Divide-by-2 output waveform input signal: 40 GHz @ 0 dBm

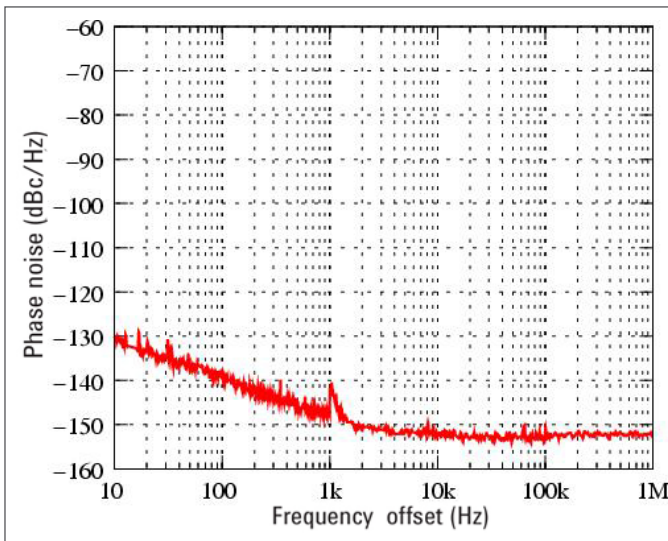


Figure 9. SSB phase noise of div-by-8 port input freq = 7.8 GHz



Figure 10. N4984A-040 clock divider front panel



Figure 11. N4984A-040 clock divider rear panel

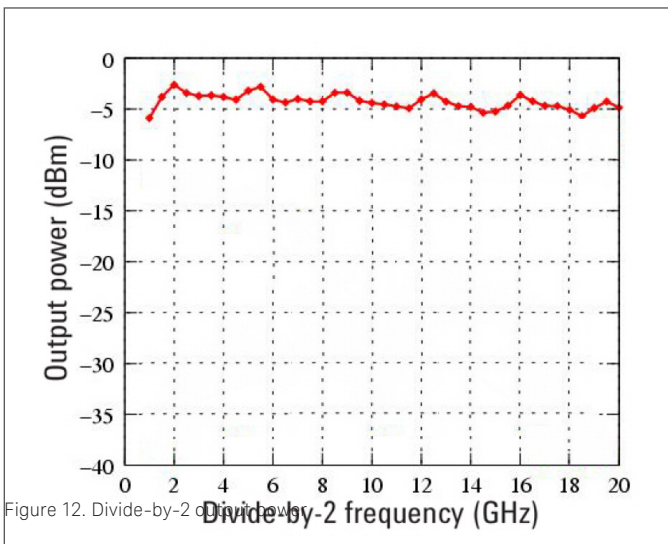


Figure 12. Divide-by-2 output power

Functional Block Diagram

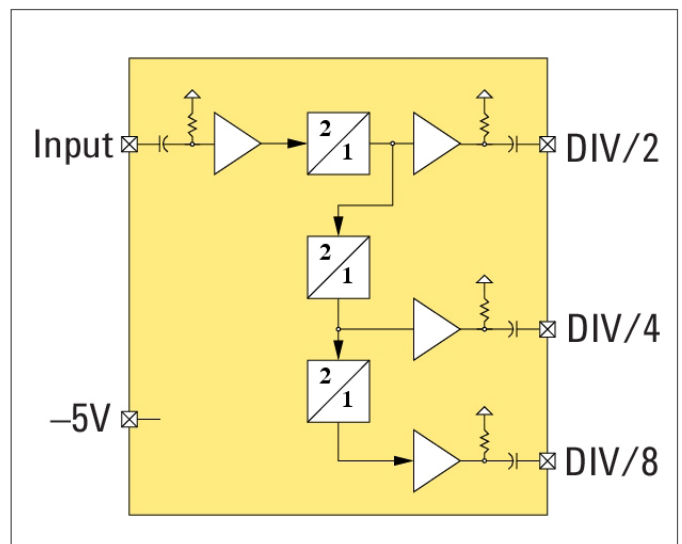


Figure 13. Functional block diagram

Specifications

General and Mechanical Parameters

Operating temperature	+10 to +40 °C
Storage temperature	-40 to +70 °C
Power requirements	42 W External AC Adaptor (included) · 100 to 240 V AC, 50 to 60 Hz, 0.6 A
Physical dimensions (W x H x D)	N4984A-020: 90 x 22 x 90 mm (3.5 x 0.875 x 3.5 in) N4984A-040: 90 x 22 x 100 mm (3.5 x 0.875 x 4.0 in)
Weight	0.5 lbs

Regulatory standards

EMC

Complies with European EMC Directive 2004/108/EC

- IEC/EN 61326-1
- CISPR Pub 11 Group 1, class A
- AS/NZS CISPR 11
- ICES/NMB-001


This ISM device complies with Canadian ICES-001.

Cet appareil ISM est conforme a la norme NMB-001 du Canada.

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

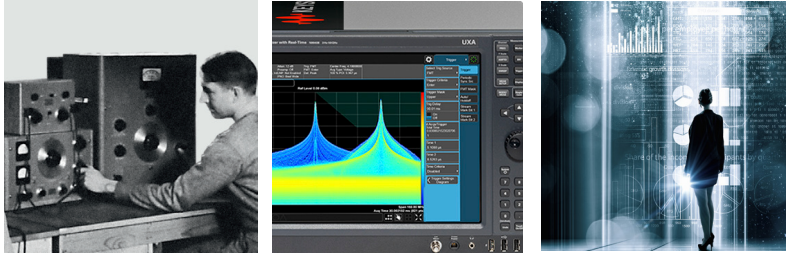

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-9-7-17)

DEKRA Certified
ISO 9001 Quality Management System

www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.

KEYSIGHT SERVICES

Accelerate Technology Adoption.
Lower costs.

Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/N4984A



This information is subject to change without notice.
 © Keysight Technologies, 2017
 Published in USA, December 1, 2017
 5991-0717EN
www.keysight.com